
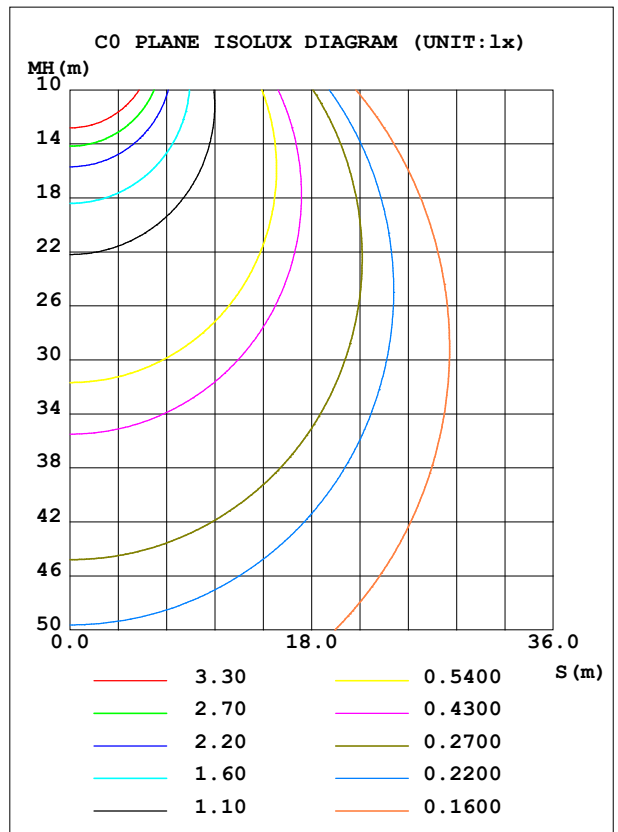


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.38V I:0.0715A P:15.380W PF:0.9754 Freq:50.00Hz Lamp Flux:1687.69x1 lm		
NAME:	TYPE: 122	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 109.73 lm/W
MODEL	122c/s	I _{max} (cd)	536.5	S/MH (C0/180)	1.25	
NOMINAL POWER (W)	15	LOR (%)	100.0	S/MH (C90/270)	1.25	
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	1687.7	η UP, DN (C0-180)	1.6, 48.6	
NOMINAL FLUX (lm)	1687.69	CIE CLASS	DIRECT	η UP, DN (C180-360)	1.6, 48.1	
LAMPS INSIDE	1	η up (%)	3.2	CIBSE SHR NOM	1.25	
TEST VOLTAGE (V)	219.5	η down (%)	96.8	CIBSE SHR MAX	1.35	

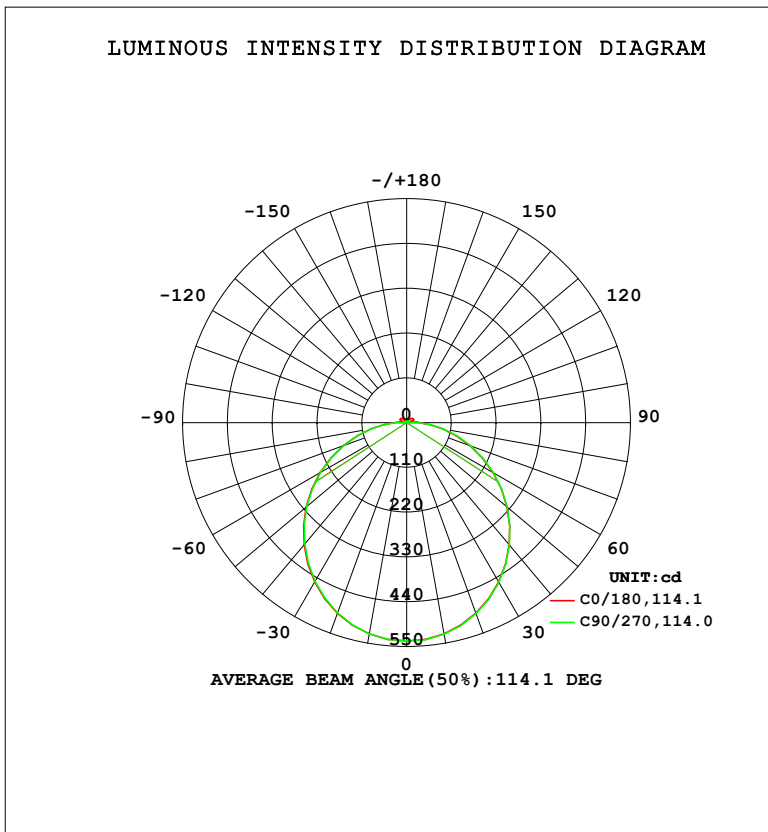

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-11-22

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity: 65.0%
 Test Distance: 9.401m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	527.1	527.7	527.6	527.7	527.2	526.7	526.8	526.8	0- 10	50.76	50.76	3.01,3.01
20	498.3	499.7	499.2	499.9	498.4	499.2	497.4	498.4	10- 20	145.4	196.1	11.6,11.6
30	452.2	455.2	452.9	454.7	452.2	453.8	450.1	453.2	20- 30	220.2	416.3	24.7,24.7
40	392.1	396.6	392.8	396.2	391.6	394.6	389.7	394.4	30- 40	265.8	682.1	40.4,40.4
50	322.0	327.9	322.8	327.2	322.2	326.3	320.0	326.2	40- 50	277.8	959.9	56.9,56.9
60	245.3	252.6	246.2	251.5	245.1	250.1	243.2	250.6	50- 60	256.8	1217	72.1,72.1
70	165.9	174.7	167.7	173.4	165.4	171.6	164.3	172.5	60- 70	207.3	1424	84.4,84.4
80	90.04	101.5	92.56	100.2	88.94	97.49	88.88	98.63	70- 80	139.8	1564	92.7,92.7
90	30.71	35.57	27.60	35.36	30.78	34.32	28.33	36.83	80- 90	69.03	1633	96.8,96.8
100	9.944	6.133	7.661	4.979	1.730	6.345	7.071	6.223	90-100	16.38	1649	97.7,97.7
110	18.78	9.581	2.184	8.977	15.67	7.852	2.300	8.603	100-110	7.573	1657	98.2,98.2
120	18.98	10.27	2.655	10.36	18.12	10.31	2.801	10.79	110-120	9.822	1667	98.8,98.8
130	16.48	7.502	3.319	8.380	16.72	8.347	3.260	8.983	120-130	8.470	1675	99.3,99.3
140	12.24	3.573	3.626	5.088	12.63	3.774	3.760	3.751	130-140	5.686	1681	99.6,99.6
150	4.250	5.970	4.301	6.080	4.376	6.061	4.383	6.311	140-150	2.857	1684	99.8,99.8
160	4.738	4.447	4.387	4.369	4.835	4.454	4.472	4.533	150-160	2.286	1686	99.9,99.9
170	4.734	4.910	4.816	4.763	4.806	4.828	4.870	4.947	160-170	1.300	1687	100,100
180	4.824	4.856	4.804	4.842	4.842	4.862	4.816	4.848	170-180	0.4714	1688	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 821.62 lm

%lum = 48.7%

%lamp = 48.7%

Conical surface Flux(130deg): 1328 lm

%lum = 78.7%


%lamp = 78.7%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-22

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.38V I:0.0715A P:15.380W PF:0.9754 Freq:50.00Hz Lamp Flux:1687.69x1 lm		
NAME:	TYPE: 122	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

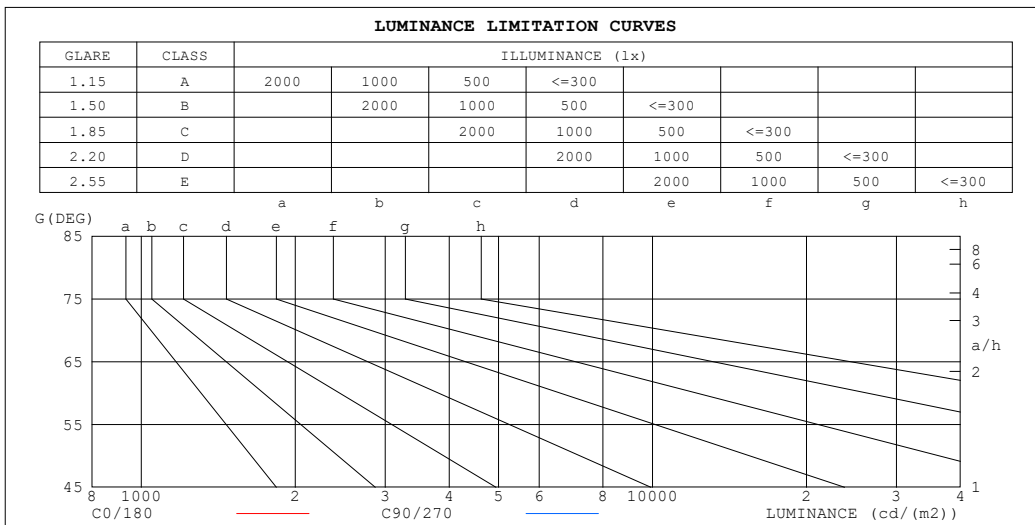

LUMINANCE cd/ (m2)		
G (DEG)	C0/180	C90/270
85	661	667
80	524	532
75	495	500
70	490	489
65	491	488
60	495	491
55	501	496
50	506	501
45	511	506


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-22

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.38V I:0.0715A P:15.380W PF:0.9754 Freq:50.00Hz Lamp Flux:1687.69x1 lm		
NAME:	TYPE: 122	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.09	1.09	1.09	1.04	1.04	1.04	.99	.99	.99	.97
1.0	1.02	.97	.93	.99	.95	.91	.94	.90	.87	.89	.87	.84	.85	.83	.81	.78
2.0	.88	.81	.74	.86	.79	.73	.82	.76	.71	.78	.73	.69	.74	.70	.67	.64
3.0	.77	.68	.61	.75	.67	.61	.71	.65	.59	.68	.62	.58	.65	.60	.56	.54
4.0	.68	.59	.52	.66	.58	.51	.63	.56	.50	.61	.54	.49	.58	.53	.48	.46
5.0	.60	.51	.44	.59	.50	.44	.57	.49	.43	.54	.48	.42	.52	.46	.42	.39
6.0	.54	.45	.39	.53	.45	.38	.51	.43	.38	.49	.42	.37	.47	.41	.36	.34
7.0	.49	.40	.34	.48	.40	.34	.46	.39	.33	.45	.38	.33	.43	.37	.32	.30
8.0	.45	.36	.30	.44	.36	.30	.42	.35	.30	.41	.34	.29	.39	.33	.29	.27
9.0	.41	.33	.27	.40	.32	.27	.39	.32	.27	.38	.31	.26	.36	.30	.26	.24
10.0	.38	.30	.25	.37	.30	.24	.36	.29	.24	.35	.28	.24	.34	.28	.24	.22

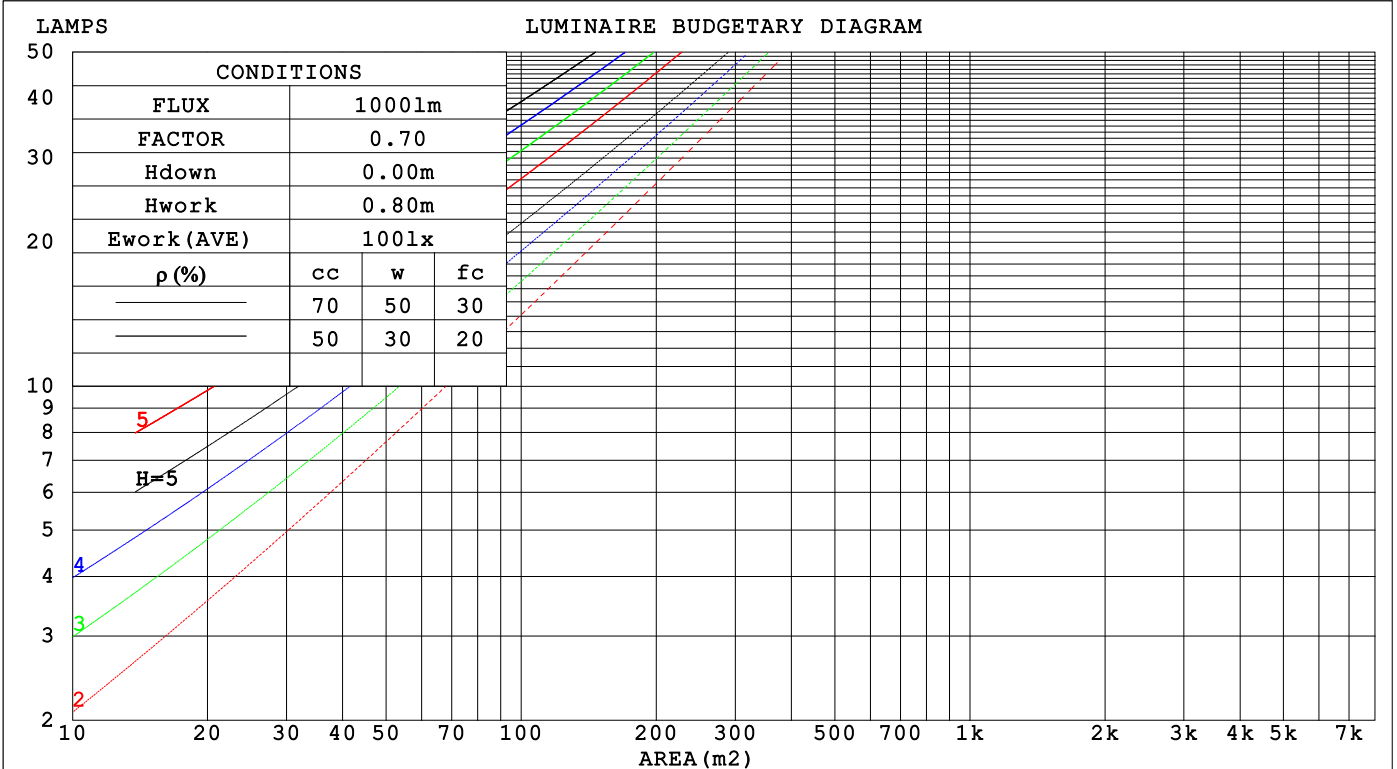

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-22

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:220.38V I:0.0715A P:15.380W PF:0.9754 Freq:50.00Hz								
Lamp Flux:1687.69x1 lm								
NAME:			TYPE: 122			WEIGHT:		
SPEC.:			DIM.:			SERIAL No.:		
MFR.: EVERFINE			SUR.:			Shielding Angle:		

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.340	.193	.061	.332	.189	.060	.317	.182	.058	.303	.175	.056	.290	.168	.054	
2.0	.309	.169	.052	.302	.166	.051	.288	.160	.050	.276	.155	.048	.264	.150	.047	
3.0	.281	.150	.045	.275	.147	.044	.263	.143	.043	.252	.138	.042	.241	.134	.041	
4.0	.257	.134	.039	.251	.132	.039	.241	.128	.038	.231	.124	.037	.221	.120	.037	
5.0	.236	.120	.035	.231	.119	.035	.221	.115	.034	.212	.112	.033	.204	.109	.033	
6.0	.218	.109	.031	.213	.108	.031	.205	.105	.031	.197	.102	.030	.189	.100	.030	
7.0	.202	.100	.028	.198	.099	.028	.190	.096	.028	.183	.094	.027	.176	.091	.027	
8.0	.188	.092	.026	.184	.091	.026	.177	.089	.025	.171	.087	.025	.165	.085	.025	
9.0	.176	.085	.024	.173	.084	.024	.166	.082	.023	.160	.080	.023	.155	.079	.023	
10.0	.165	.079	.022	.162	.078	.022	.156	.077	.022	.151	.075	.021	.146	.073	.021	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.215	.215	.215	.184	.184	.184	.126	.126	.126	.072	.072	.072	.023	.023	.023	
1.0	.207	.181	.157	.177	.155	.135	.121	.107	.093	.070	.062	.054	.022	.020	.018	
2.0	.200	.157	.121	.171	.135	.105	.117	.093	.073	.068	.054	.043	.022	.018	.014	
3.0	.192	.140	.098	.165	.120	.085	.113	.084	.060	.065	.049	.035	.021	.016	.011	
4.0	.184	.127	.083	.158	.109	.072	.109	.076	.050	.063	.045	.030	.020	.015	.010	
5.0	.177	.116	.072	.152	.101	.062	.104	.070	.044	.061	.041	.026	.019	.013	.009	
6.0	.169	.108	.064	.145	.094	.056	.100	.065	.039	.058	.039	.023	.019	.013	.008	
7.0	.162	.101	.058	.140	.088	.051	.096	.061	.036	.056	.036	.021	.018	.012	.007	
8.0	.156	.095	.054	.134	.083	.047	.093	.058	.033	.054	.034	.020	.017	.011	.007	
9.0	.149	.090	.051	.129	.079	.044	.089	.055	.031	.052	.033	.019	.017	.011	.006	
10.0	.144	.086	.048	.124	.075	.042	.086	.053	.030	.050	.031	.018	.016	.010	.006	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-22

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.38V I:0.0715A P:15.380W PF:0.9754 Freq:50.00Hz										
Lamp Flux:1687.69x1 lm										
NAME:			TYPE: 122				WEIGHT:			
SPEC.:			DIM.:				SERIAL No.:			
MFR.: EVERFINE			SUR.:				Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	8.5	10.0	8.8	10.3	10.6	8.5	10.0	8.8	10.2	10.5
3H	10.2	11.6	10.6	11.9	12.2	10.2	11.6	10.5	11.9	12.2
4H	11.0	12.3	11.4	12.6	13.0	11.0	12.3	11.4	12.6	13.0
6H	11.7	12.9	12.1	13.3	13.6	11.7	13.0	12.1	13.3	13.6
8H	12.0	13.2	12.4	13.5	13.9	12.0	13.2	12.4	13.6	13.9
12H	12.2	13.4	12.6	13.8	14.2	12.3	13.5	12.7	13.8	14.2
4H 2H	9.2	10.5	9.5	10.8	11.1	9.1	10.5	9.5	10.8	11.1
3H	11.1	12.3	11.5	12.6	13.0	11.1	12.3	11.5	12.6	13.0
4H	12.0	13.1	12.5	13.5	13.9	12.0	13.1	12.5	13.5	13.9
6H	12.9	13.9	13.4	14.3	14.7	12.9	13.9	13.4	14.3	14.7
8H	13.3	14.2	13.7	14.6	15.1	13.3	14.2	13.8	14.6	15.1
12H	13.6	14.5	14.1	14.9	15.4	13.7	14.5	14.2	15.0	15.5
8H 4H	12.4	13.3	12.9	13.8	14.2	12.4	13.3	12.9	13.8	14.2
6H	13.5	14.3	14.0	14.8	15.3	13.6	14.3	14.1	14.8	15.3
8H	14.1	14.7	14.6	15.2	15.7	14.1	14.8	14.6	15.3	15.8
12H	14.6	15.2	15.1	15.7	16.2	14.7	15.2	15.2	15.7	16.3
12H 4H	12.5	13.3	13.0	13.8	14.3	12.5	13.3	13.0	13.8	14.3
6H	13.7	14.4	14.2	14.8	15.4	13.7	14.4	14.2	14.9	15.4
8H	14.3	14.9	14.8	15.4	15.9	14.3	14.9	14.9	15.4	16.0
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.1				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.1 / - 0.3				

CIE Pub.117, 1688 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 1.8)
 Area: 1 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-22

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.38V I:0.0715A P:15.380W PF:0.9754 Freq:50.00Hz Lamp Flux:1687.69x1 lm		
NAME:	TYPE: 122	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	55	43	36	54	43	36	53	42	36	29
0.80	65	53	45	64	52	45	62	51	45	37
1.00	73	61	54	72	61	53	69	62	53	45
1.25	80	69	61	78	68	61	75	66	60	52
1.50	85	75	67	83	73	66	80	71	65	57
2.00	92	83	76	90	81	75	86	79	73	64
2.50	96	88	81	94	86	80	89	83	78	69
3.00	100	92	86	97	90	85	93	87	82	73
4.00	104	97	92	101	95	91	96	92	88	78
5.00	106	101	96	104	99	95	99	95	91	81
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-22

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.38V I:0.0715A P:15.380W PF:0.9754 Freq:50.00Hz Lamp Flux:1687.69x1 lm		
NAME:	TYPE: 122	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

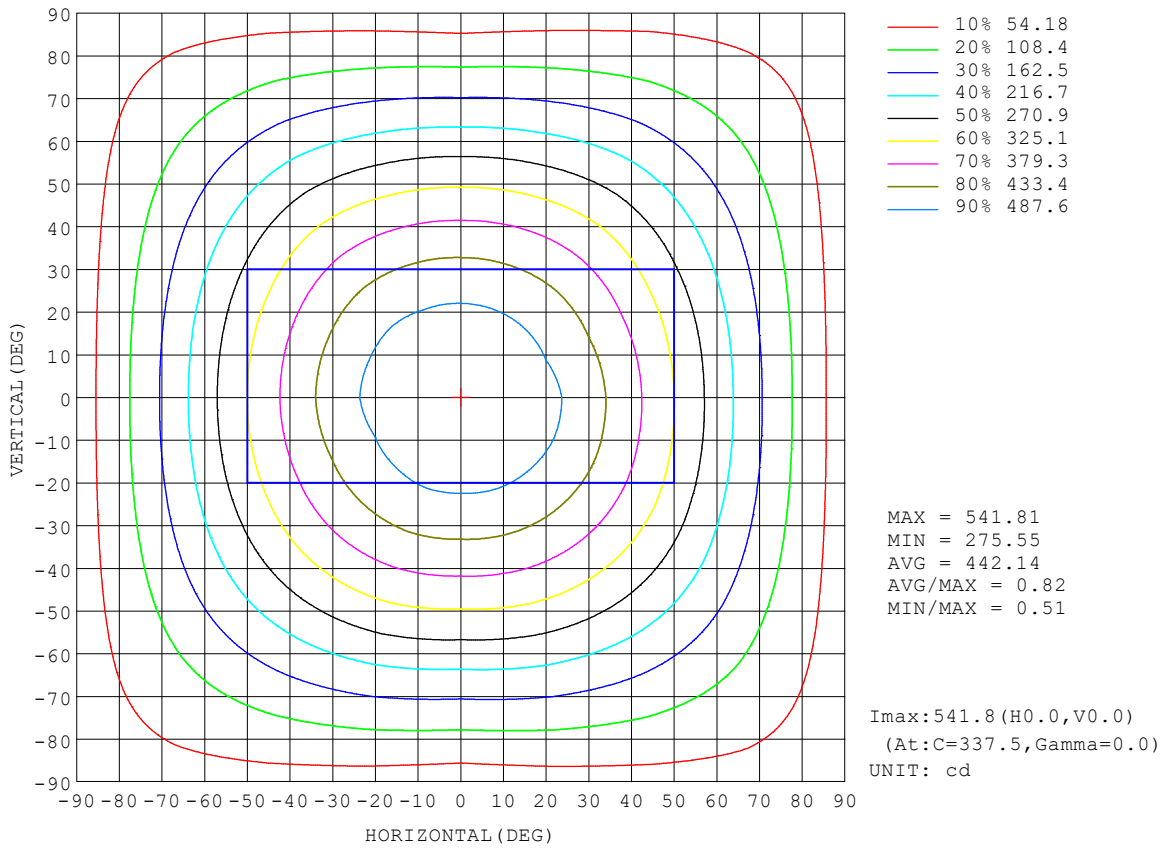


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-22

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

AAI Figure

Test:U:220.38V I:0.0715A P:15.380W PF:0.9754 Freq:50.00Hz Lamp Flux:1687.69x1 lm		
NAME:	TYPE: 122	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

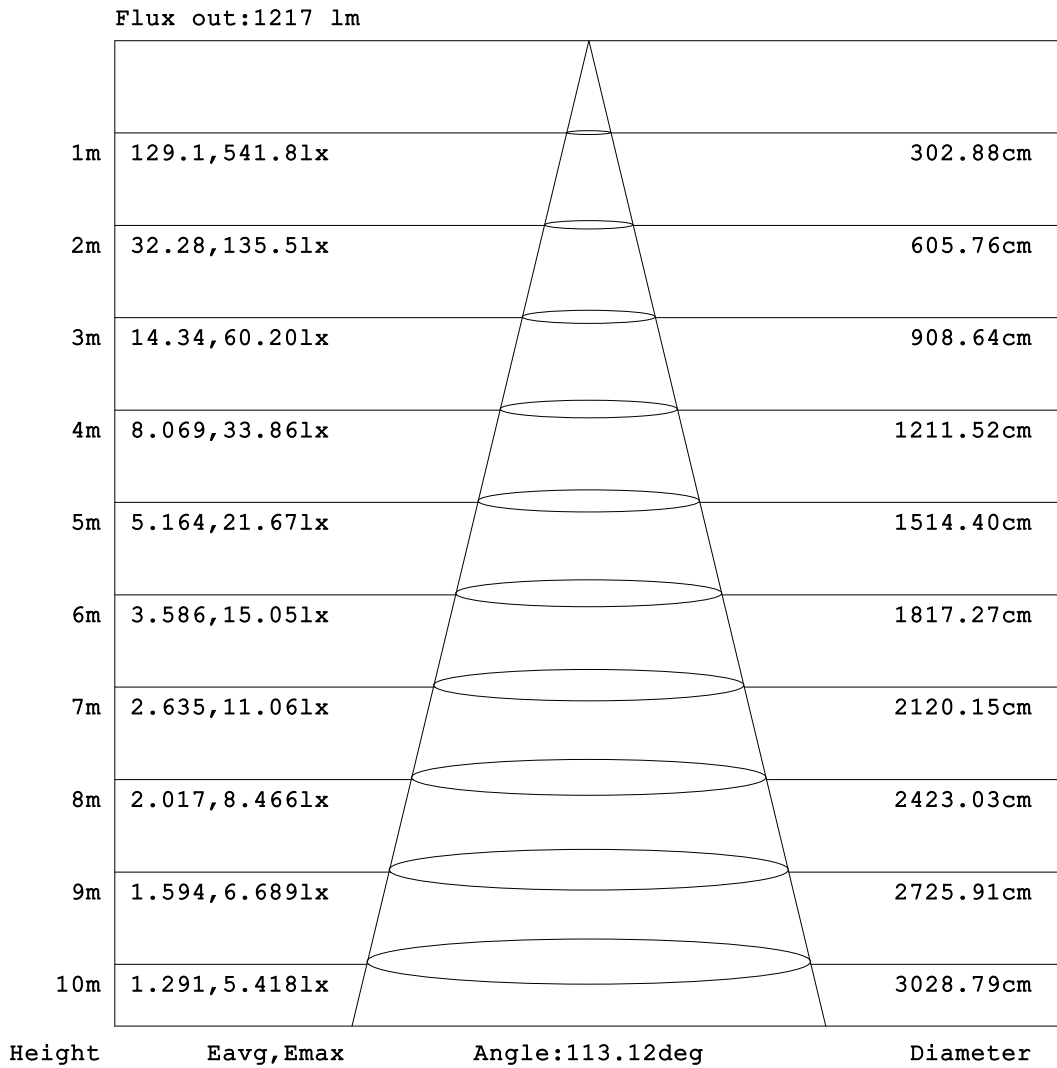


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-11-22

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity: 65.0%
 Test Distance: 9.401m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:220.38V I:0.0715A P:15.380W PF:0.9754 Freq:50.00Hz Lamp Flux:1687.69x1 lm		
NAME:	TYPE: 122	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

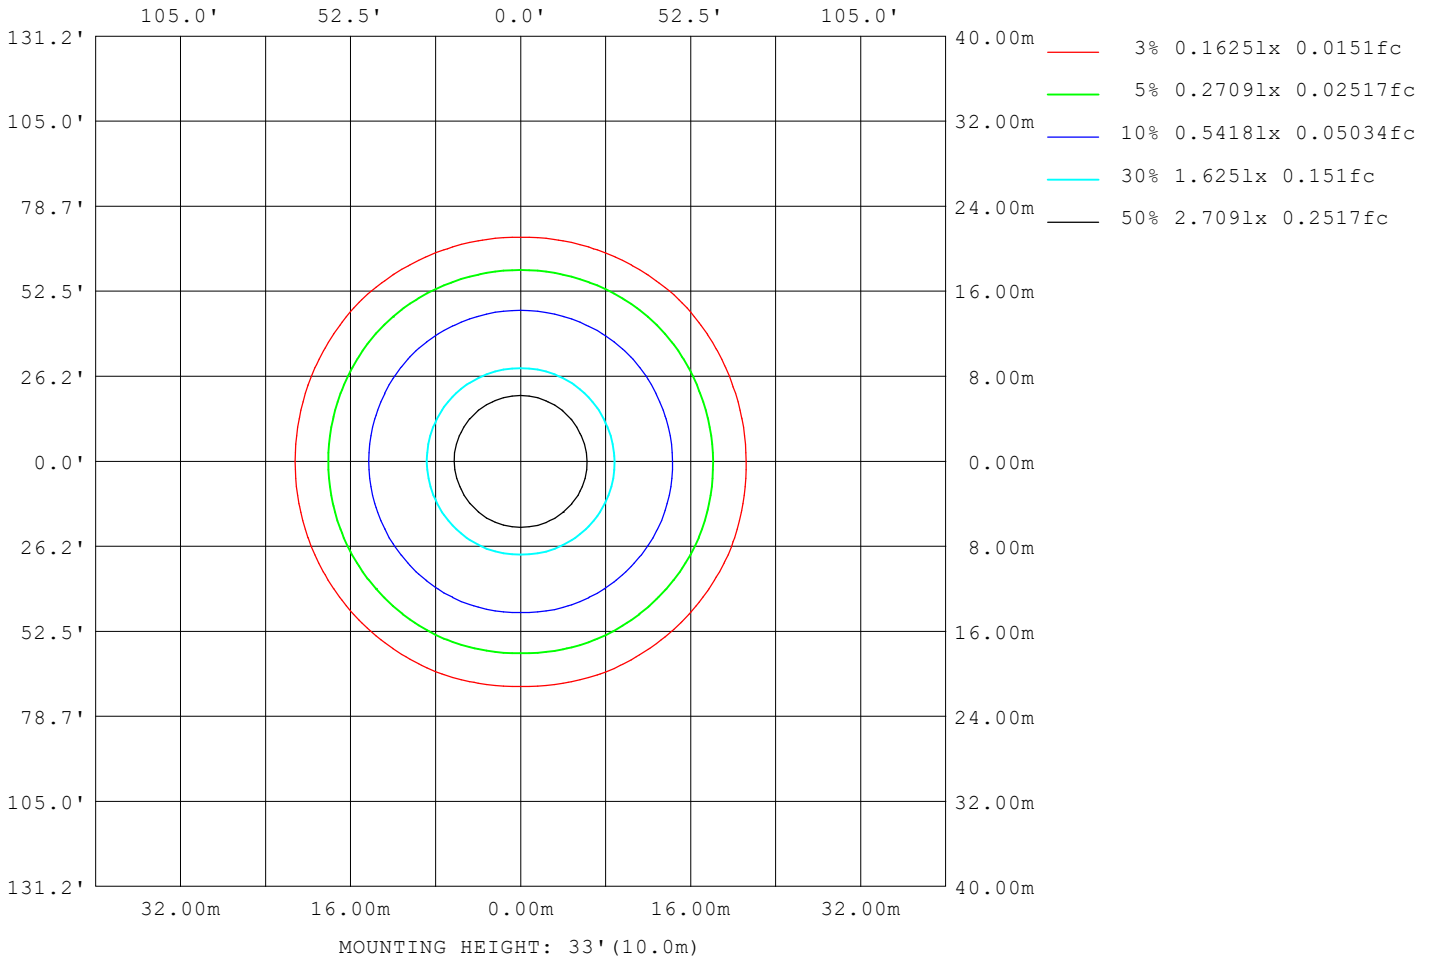

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-22

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:220.38V I:0.0715A P:15.380W PF:0.9754 Freq:50.00Hz Lamp Flux:1687.69x1 lm		
NAME:	TYPE: 122	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	486
L_0~180 (75) av	488
L_0~180 (85) av	647
L_90~270 (65) av	486
L_90~270 (75) av	493
L_90~270 (85) av	652
L_45 (65) av	502
L_45 (75) av	524
L_45 (85) av	756

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-22

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

Planar Illuminance Curve

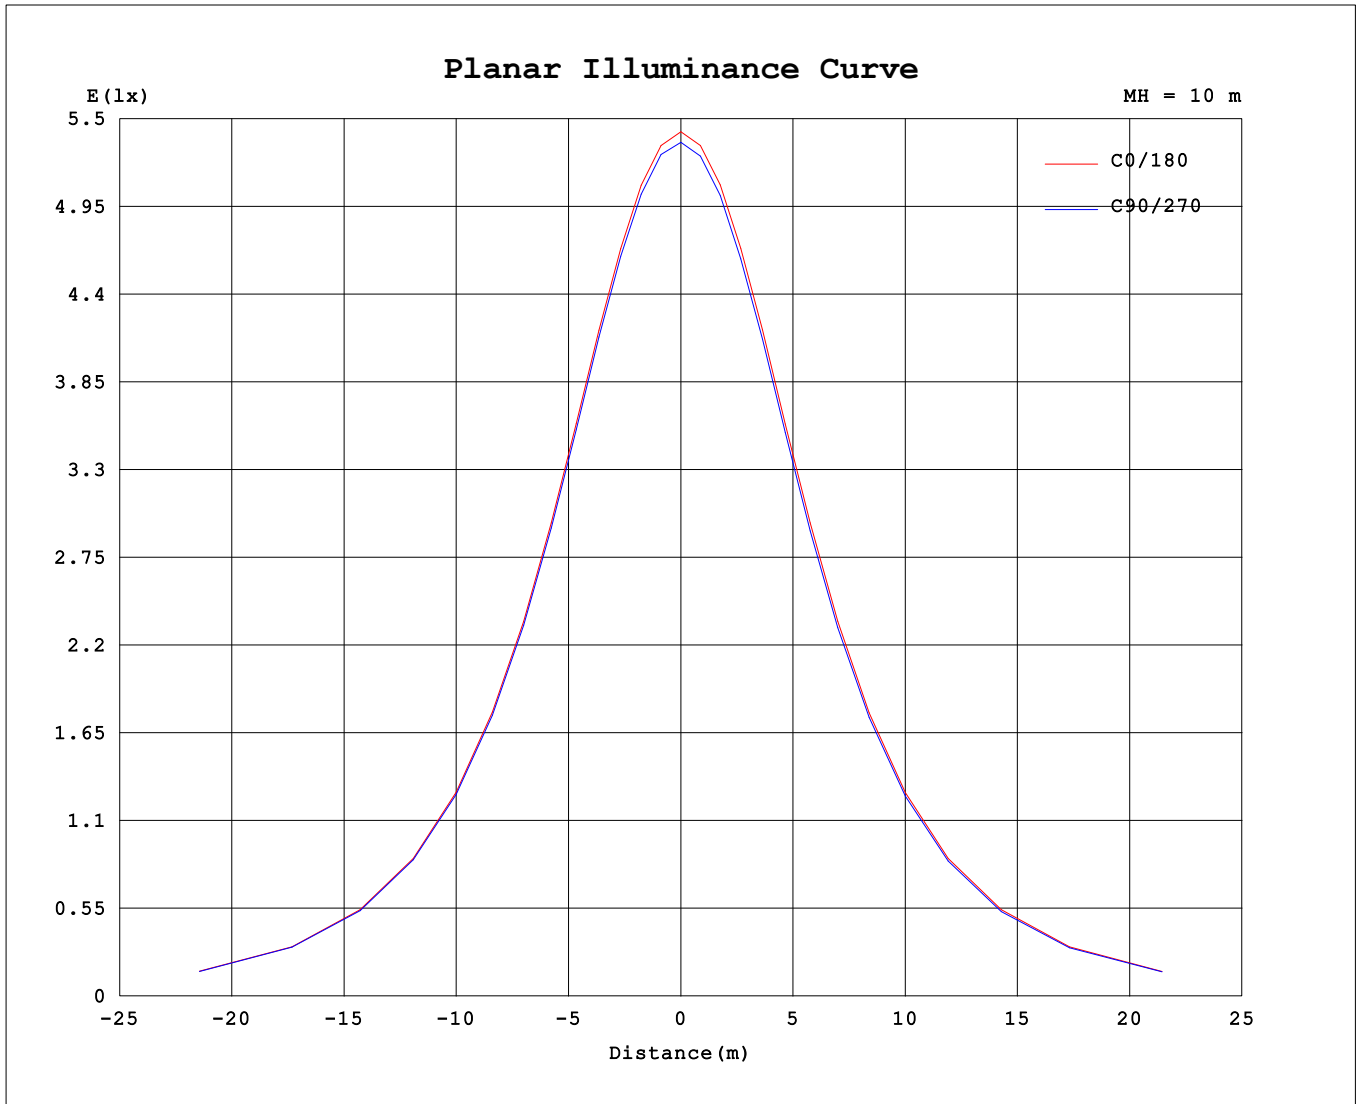

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-11-22

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity: 65.0%
 Test Distance: 9.401m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.38V I:0.0715A P:15.380W PF:0.9754 Freq:50.00Hz Lamp Flux:1687.69x1 lm		
NAME:	TYPE: 122	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	537	537	537	537	537	537	537	537	537	537	537	537	537	537	537	537			
5	534	534	534	535	535	534	534	534	534	534	534	534	534	534	534	534			
10	527	527	528	528	528	527	528	527	527	526	527	527	527	526	527	527			
15	515	516	516	516	516	516	516	516	515	514	515	514	514	514	515	515			
20	498	500	500	501	499	500	500	500	498	497	499	497	497	497	498	498			
25	477	479	480	479	478	479	479	479	477	476	478	476	476	475	478	477			
30	452	455	455	455	453	454	455	454	452	451	454	451	450	450	453	452			
35	423	427	427	427	424	427	427	426	423	423	426	423	421	422	425	424			
40	392	396	397	396	393	395	396	395	392	392	395	391	390	391	394	393			
45	358	363	363	363	359	362	363	362	358	358	361	358	356	357	361	360			
50	322	328	328	328	323	327	327	326	322	322	326	322	320	322	326	324			
55	284	291	291	291	285	290	290	289	284	285	289	284	282	284	289	286			
60	245	252	253	252	246	252	251	250	245	246	250	246	243	245	251	248			
65	205	212	213	213	207	213	212	211	205	207	211	207	204	206	211	209			
70	166	173	175	174	168	174	173	171	165	168	172	168	164	168	172	169			
75	127	134	138	136	130	135	136	133	126	130	134	130	126	131	135	131			
80	90.0	98.5	102	99.4	92.6	98.8	100	96.7	88.9	93.8	97.5	93.7	88.9	94.4	98.6	95.3			
85	57.0	65.7	67.7	65.3	58.3	64.7	66.6	63.9	55.8	61.2	63.9	60.5	55.4	61.2	65.4	62.6			
90	30.7	35.8	35.6	33.4	27.6	33.6	35.4	35.2	30.8	35.0	34.3	33.2	28.3	33.0	36.8	35.3			
95	25.8	19.6	4.68	4.94	6.09	4.58	2.66	12.9	19.0	12.4	2.19	6.22	8.34	5.87	6.10	20.4			
100	9.94	5.70	6.13	9.54	7.66	9.38	4.98	1.66	1.73	1.80	6.34	8.03	7.07	9.25	6.22	5.84			
105	6.28	6.90	7.22	6.84	6.90	6.39	6.41	5.02	3.78	5.69	6.17	6.52	8.17	7.08	7.14	7.50			
110	18.8	15.3	9.58	3.95	2.18	3.57	8.98	14.3	15.7	14.7	7.85	3.70	2.30	3.87	8.60	15.9			
115	19.5	15.9	10.3	4.15	2.43	3.66	10.3	15.4	19.0	14.9	9.60	4.10	2.55	3.72	10.4	15.6			
120	19.0	16.0	10.3	3.48	2.65	3.23	10.4	15.6	18.1	14.9	10.3	3.42	2.80	3.47	10.8	15.8			
125	18.2	15.1	7.78	3.78	2.94	3.28	8.32	15.2	18.1	15.2	7.99	3.23	3.07	3.15	8.28	15.6			
130	16.5	13.6	7.50	4.40	3.32	3.71	8.38	13.8	16.7	13.7	8.35	4.04	3.26	3.87	8.98	14.1			
135	14.8	12.7	3.33	4.24	3.57	4.12	3.34	12.9	15.0	12.5	3.48	4.27	3.59	4.22	3.55	13.1			
140	12.2	3.93	3.57	3.90	3.63	3.97	5.09	7.47	12.6	4.97	3.77	3.99	3.76	4.04	3.75	4.08			
145	4.02	4.36	4.89	3.82	3.78	3.87	3.72	3.84	4.14	4.00	3.93	3.97	3.98	4.01	3.94	4.22			
150	4.25	4.17	5.97	4.44	4.30	4.32	6.08	4.14	4.38	4.31	6.06	4.64	4.38	4.56	6.31	4.33			
155	7.84	6.89	4.31	4.18	4.19	4.15	4.31	6.91	5.70	6.87	4.42	4.23	4.30	4.27	4.39	7.00			
160	4.74	4.37	4.45	4.27	4.39	4.21	4.37	4.34	4.83	4.41	4.45	4.27	4.47	4.35	4.53	4.43			
165	4.41	4.52	4.73	4.52	4.48	4.43	4.57	4.42	4.50	4.46	4.63	4.48	4.52	4.54	4.81	4.55			
170	4.73	4.99	4.91	5.11	4.82	4.98	4.76	4.95	4.81	5.00	4.83	5.01	4.87	5.12	4.95	5.02			
175	5.19	5.02	4.93	5.00	4.95	4.92	4.87	4.90	4.98	4.97	4.95	4.94	4.94	5.02	4.94	5.03			
180	4.82	4.83	4.86	4.82	4.80	4.82	4.84	4.81	4.84	4.83	4.86	4.83	4.82	4.80	4.85	4.81			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-22

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks: